

Mammography unit

Mobile screening clinic

With HMK Bilcon's **Mammography unit**, you get a mobile screening clinic that is equipped like a stationary mammography clinic in a hospital. It can be set up anywhere, which gives great flexibility and the opportunity to carry out mammography screenings in outlying areas, where it may be a long way from a hospital. The clinic is constructed with 63 mm fiberglass-reinforced polyester panels, which form both the outer and inner cladding manufactured according to the "sandwich" principle to ensure great strength and good insulation. The walls in the mammography room are lined with lead to protect against X-ray radiation.

Intelligent interior design

The mammography clinic has a floor area of 34 m² and can be divided into several rooms, which are bright and inviting. It is equipped with air conditioning and underfloor heating and can be furnished with an examination room with a mammography machine, a staff room, changing rooms, a waiting room, kitchen facilities and a toilet. The conditions for the patients are pleasant, and at the same time it is a spacious workplace with a good working environment and well-designed ergonomic conditions for the healthcare staff.



BENIFITS

HIGH QUALITY

FAST SETUP

DELIVERY ON TIME

FLEXIBLE INTERIOR DESIGN

LONG LIFETIME


UP TO 3 YEARS WARRANTY

Mammography unit

Mobile screening clinic

Dimensions

	Internal	External
Length		13.60 m
Width, transport	2.44 m	2.55 m
Total height, transport		4.00 m
Internal height	2.30 m	
Entrance height above ground	1.10 m	
Total floor area	34 m ²	
Net weight (depending on equipment)		12,000 kg

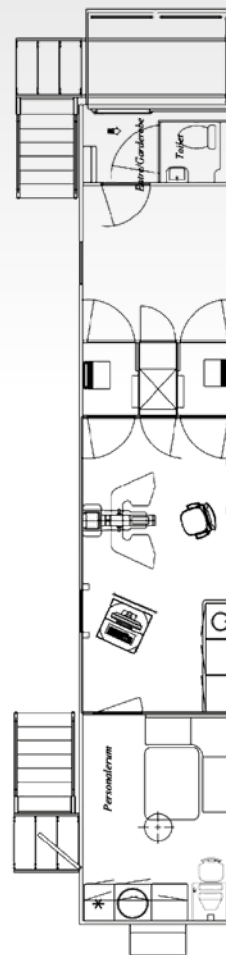

EQUIPMENT & OPTIONS

AIR-CONDITION

FLOOR HEATING

GENERATOR

KITCHEN FACILITIES

TOILET

CHANGING ROOM

INTERNAL NETWORK

AND MUCH MORE